

ZTEGS-16P2USFP

AI PoE Switch

Product Features

- Total 300W Power Supply
- 16 ports PoE
- 2 ports SFP
- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- Support bt 60W High Power

SPECIFICATIONS


Model	ZTEGS-16P2USFP
Ports	PoE (1~14):10/100/1000Mbps PoE ports (RJ45) PoE (15~16):10/100/1000Mbps PoE ports,Support bt 60W High Power SFP(1~2):10/100/1000Mbps SFP ports
Transmission Rate	2000Mbps Full Duplex; 10 or 100 or 1000 Mbps Half Duplex
Transmission Distance	130m
Performance Specification	Bandwidth:36Gbps
	Network Latency (10 to 1000Mbps): 16μs (use the 64byte package size)
	MAC address table: 8K
	The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port;1488000pps the most for 1000M port
Networking Standard	IEEE 802.3i 10BASE-T/IEEE 802.3u 100BASE-TX
	IEEE 802.3ab 1000BASE-T
	IEEE 802.3x Flow Control
	IEEE 802.3af/at/bt Power over Ethernet
Power Support	Power Input: AC 90~240V Totals300W AI Watchdog: Port 1~16
	Power Output: PoE1~14 Port: 1/2(+52V), 3/6(GND)≤30W PoE15~16 Port:1245(+53V),3678(GND) Compatible1/2(+52V), 3/6(GND)≤60W
Protection Level	Lightning Protection:6KV, Per: IEC61000-4-5 ESD Protection:8KV, Per: IEC61000-4-2
Physical Specifications	Size(L*W*H): 430mm*180mm*45mm, Weight: 2.65KG
Working Environment	Operating Temperature: -30℃~60℃
	Storage Temperature: -40℃~70℃
	Operating Humidity: 10%~90% Non-condensing
	Storage Humidity: 5%~90% Non-condensing
Certification	CE Mark
	FCC Part15 Class B
	RoHS 2.0
Warranty	Whole Device: 1 year
Package Content	AC Power Cable,User Manual

Ports Description



- ① 1000Mbps PoE Ports
- ② 60W Power Ports
- ③ 3 1000Mbps SFP Ports

Dimensions

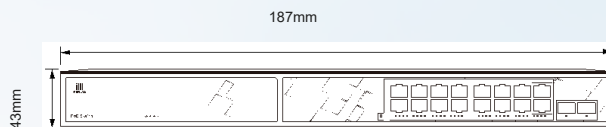


Installation Diagram

Wall Mounted



Rack Mounted



Desktop Mounted

