



ZERO TECH
TAKING YOU FORWARD

ZTNX-32CH-FRPRO-HSRP

This series supports 32 CH 32MP/16MP/12MP /8MP / 6MP / 5MP / 4MP 3MP / 1080P / 1280 × 1024 / 960P /720P high-definition IP video input, which adopts the advanced SOC technique to ensure high-definition recording in each channel and realize outstanding robustness of the system. This series supports 32 CH IP input, simultaneous 16 CH playback, and 8K high definition display. So it can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.



FEATURES

Support 32 CH 32MP/16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/
1280x1024 /960P/720P/960H/D1/CIF IP input
H.265S/H.265+/H.265/H.264 coding
, (Intuitive and user-friendly Graphic User Interface (GUI
Windows style operation by mouse
Multi-mode recording: manual / timed / motion / sensor/ POS / AI recording
Playback: 16 CH simultaneous playback
Search: time slice, time, event, tag, smart and target database search
Support face detection and comparison
, Support multiple VCA (Video Content Analytics) events
. such as region intrusion, tripwire, etc
Support OS information overlay on live view and playback
Support RAID 0, 1, 5, 6, 10
Express and flexible backup via USB, network and so on
Preview, record, playback, backup and remote access are supported
. DHCP, DDNS, PPPoE network protocol, etc
. Compatible with third-party IPCs, such as ONVIF, Hikvision, etc
Remote control via Web Client or CMS : preview, playback, backup
PTZ and configuration
Multi-user online simultaneously
Authorization management, log view and device status view
8K output, true high resolution display
Support PTZ preset and auto cruise, up to 255 presets and 8 cruises
Support NAT function and QR Code scanning by mobile phones
Powerful mobile surveillance by smart phones with iOS and Andriod OS



4K Output



HD IPC



DDNS



Network



PTZ



Audio



MIC



Mobile



CMS



USB



Mouse



E-mail



STD



FR



VCA



SPECIFICATIONS

Model		
System	OS	Embedded Linux
Video	IP Video Input	32
	Network Bandwidth	Incoming: 320Mbps Outgoing: 320Mbps
	Resolution	32MP/16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Output	HDMI1: 7680×4320@60 7680×4320@30 3840×2160@60 3840×2160@30 1920×1080 1280×1024 1024×768 (When the resolution of HDMI1 output is 8K, HDMI2 is unavailable)
		HDMI2: 3840×2160@60 3840×2160@30 1920×1080 1280×1024 1024×768
		HDMI3: 3840×2160@60 3840×2160@30 1920×1080 1280×1024 1024×768
		HDMI4: 1920×1080 1280×1024 1024×768
		VGA×1: 1920×1080 1280×1024 1024×768 (VGA and HDMI1 output the same video source)


	Multi-screen Display	Main output: 1/4/6/8/9/13/16/25/32/36 AUX output 1: 1/4/6/8/9/13/16/25/32/36 AUX output2: 1/4/6/8/9/13/16 AUX output 3: 1/4/6/8/9/13/16 Max. 96(32+32+16+16)
	Compression	H.264/H.265/H.265S
Audio	Network input	32
	Local Input	RCA×1 (for two-way talk)
	Local Output	RCA×1
	HDMI Audio Output	Support
	Compression	G.711(U/A)
Record	Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280x1024/960P/720P/960H/D1/CIF
	Frame Rate	N:30fps P:25fps
Playback	Simultaneous Playback	16CH
	Search	Time slice/time/event/tag/smart search
	Function	Play, pause, FF, Rewind, digital zoom, previous frame, next frame, etc.
Decoding Capability	Live View	1×16MP@30 / 4×12MP (only available for main output)
	Playback	1×16MP@30 / 4×8MP(only available for main output)/
Alarm	Mode	Manual, sensor, motion, exception, smart events, etc.
	Input	16CH
	Output	8CH
	Triggering	Record, snapshot, preset, e-mail, etc
Face	Face Detection	32CH
	Face Detection (AI by Device)	4CH
	Face Match Performance	16CH
	Comparison Capability	36 pictures/second
	Face Picture Database	32 libraries 10000 face pictures
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Supports successful face recognition alarm and stranger match alarm
	Track	Track display on a map
	Statistical Graph of Information	Bar graph
	Statistical Mode of Information	Statistics by day, week, month, quarter as well as customized time period
Video Structure Analysis	Human/Vehicle Classification (AI by IPC)	32CH
	Human/Vehicle Classification (AI by Device)	8CH
	Human/Vehicle Attribute Analysis (AI by IPC)	Yes
	Fisheye Access	Yes




	Interface	RJ45 10/100/1000Mbps ×2
	Client Connection	Max. 128 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA× 8 max 16TB per HDD
	RAID Type	RAID0,1,5,6,10
	E-SATA Interface	2
Port	USB	USB3.0× 1 USB2.0 × 3(Front:2)
	RS485	Yes (full-duplex)
	RS232	Yes
	Reset	Yes
	12V Output	Yes (1A)
	Remote Controller	Optional
Others	Power	Single or redundant, AC100V 240V
	Consumption	≤50W (without HDD)
	Dimensions	560×437.2×88mm
	Certificate	CE,FCC
	Environmental Protection	Directive EU RoHS, WEEE(2012/19/EU) , Directive 94/62/EC and REACH(EC1907/2006)
	Working Environment	-10~50°C; Humidity: 10%~90%

REAR PANEL

REAR PANEL FOR SINGLE POWER SUPPLY

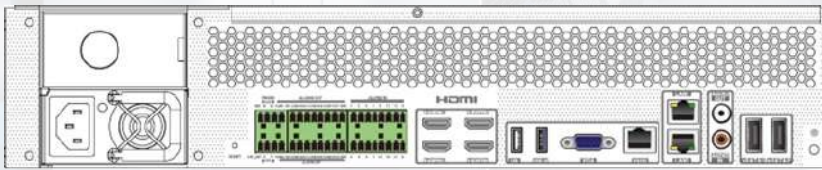

REAR PANEL FOR REDUNDANT SERIES

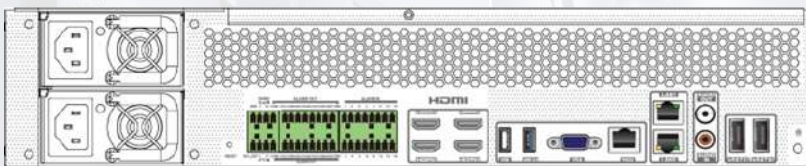

DIMENSIONS

