

Mixer Amplifier

ZTPA-12021D




Features

- 100V output
- With MIC priority function, adjustable mute degree
- Support remote infrared control
- Built-in MP3, support multiple decoding formats: MP3, WMA, WAV, APE, FLAC
- Recording and Bluetooth function: one MIC input and one Line input
- Independent volume control of MIC and Line, with treble and bass control, MIC with soundeffect and delay
- Bluetooth 4.0, transmission distance >8m
- Feedback suppression, original sound elimination function


Specification

Item		Specification
Rated Output Power		120W
Input Sensitivity	MIC	$\leq 3.5\text{mV}$
	AUX	$\leq 280\text{mV}$
SNR	AUX	$\geq 85\text{dB}$
Frequency Response		80Hz-12KHz ($\pm 3\text{dB}$)
THD		$\leq 1\%$ (1KHz, in normal working status)
Auxiliary Output Voltage		$\geq 800\text{mV}$
Pitch Range	Bass	$\pm 10\text{dB}$ (100Hz)
	Treble	$\pm 10\text{dB}$ (10kHz)
Mute Function		MIC1 input overrides other input
RMS		150W
Dimension (L×W×H)		187×280×65mm
Net Weight		2.5kg
Gross Weight		3.0kg

Description of front panel

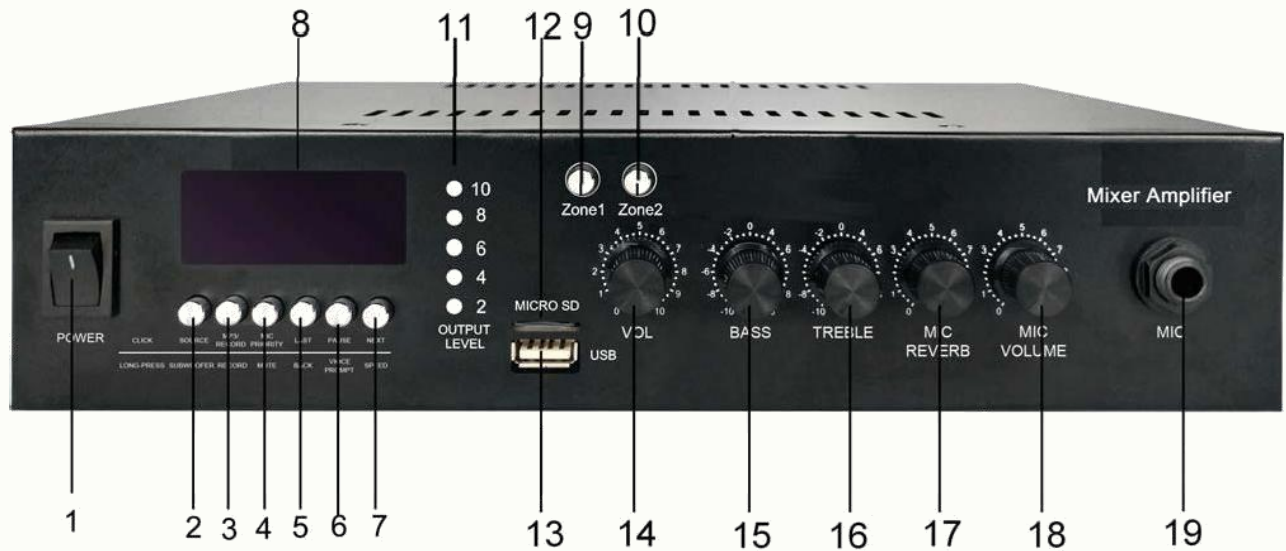

Description of rear panel

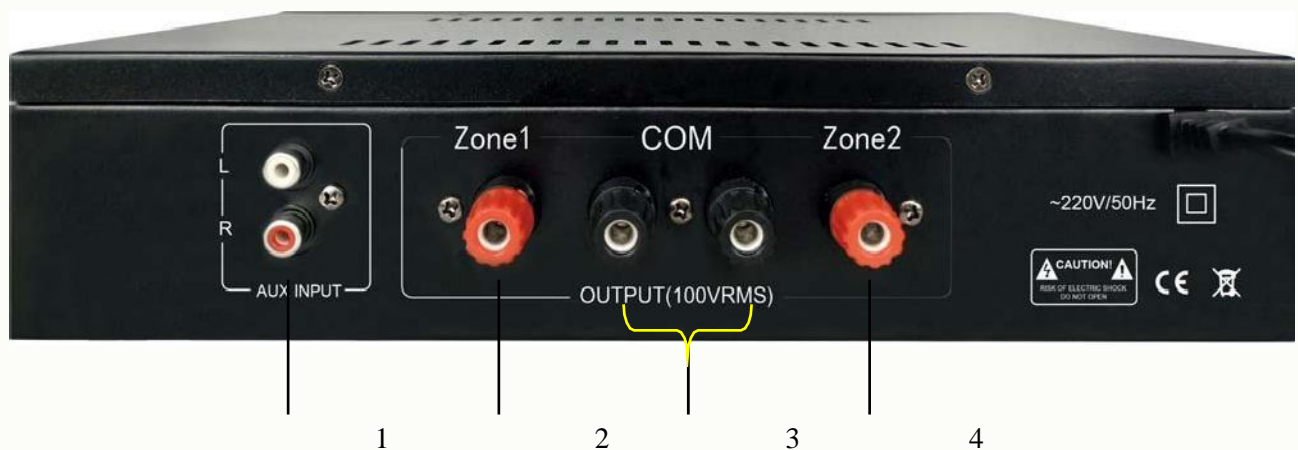


1. AUX in, or line input
2. Zone 1 output
3. Connect with ground wire
4. Zone 2 output



Connection Diagram

Auxiliary Input Connection

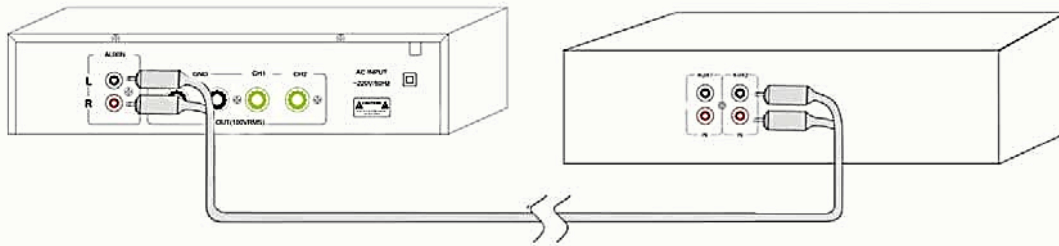

3.1 USB Connection

