

16CH PoE NVR

16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR



ZTN-EG16CH4K-POE-FR

-  4K Output
-  16MP
-  DDNS
-  Network
-  PTZ
-  Audio
-  MIC
-  Mobile
-  CMS
-  USB
-  Mouse
-  E-mail
-  STD
-  FR
-  VCA

ZTN-EG16CH4K-POE-FR supports 16CH 16MP / 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280x1024/960P/ 720P high definition IP input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system. ZTN-EG16CH4K-POE-FR integrates with 16 PoE network ports and supports 16 CH IPC direct connection to NVR , simultaneous 16 CH playback, and 4K high definition display. The series of product can meet different security requirements of home, financial, commerce, enterprise, transportation and government, etc.

SPECIFICATIONS

| Model | | ZTN-EG16CH4K-POE-FR |
|----------------------------------|---|--|
| System | OS | Embedded Linux |
| Video | Compression | H.265S/H.265+/H.265/H.264 |
| | IP Video Input | 16CH IPC input |
| | Resolution | 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF |
| | Incoming/Outgoing Bandwidth | 192Mbps/192Mbps *When the AI function of the IPC is enabled, the actual incoming bandwidth(max.bitrate) is more than the set value in the NVR. |
| | Output | HDMI : 3840 × 2160/1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA : 1920 × 1080 / 1280 × 1024 / 1024 × 768 VGA can be set to output the same or different video source with HDMI |
| Audio | Multi-screen Display | Main output: 1/4/6/8/9/13/16 (live view) AUX output: 1/4/6/8/9 (live view) AI mode: max 16CH (HDMI and VGA output the same video source, AI by device supported) Non-AI mode (default mode): max 25CH (VGA can be set to output the same or different video source with HDMI, AI by device not supported) |
| | Network Input | 16 CH IPC audio input |
| | 2-way Audio | RCA × 1 |
| | Local Output | RCA × 1 |
| Record | Compression | G.711(U/A) |
| | Resolution | 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF |
| Playback | Frame Rate | NTSC: 30fps; PAL: 25fps |
| | Simultaneous Playback | Max 16CH |
| | Search | Time slice / time / event / tag / smart search |
| | Smart Search | Highlighted color to display the camera record in a certain period of time, different colors refers to different record events |
| Decoding Capability | Function | Play, pause, FF, FB, digital zoom, etc. |
| | Live View/Playback | up to 8ch@8mp or 16ch@4mp |
| Alarm | Mode | Manual, sensor, motion, exception, smart events, etc. |
| | Input | 8 CH local alarm input |
| | Output | 4 CH |
| | Triggering | Record, snap, preset, e-mail, etc. |
| Face | Face Detection Performance (AI by IPC) | 16 CH |
| | Face Detection Performance (AI by Device) | 2 CH (2MP) |
| | Face Match Performance | 6 CH |
| | Comparison Capability | 18 pictures / second |
| | Face Picture Database | 32 libraries 10000 Face Pictures |
| | Face Picture Search | Search by picture is supported |
| | Database Management | Add, modify, delete and search face pictures |
| | Face Picture Adding | Add face pictures through APP, WEB and external import |
| | Face Picture Comparison | Support successful face recognition alarm and stranger match alarm |
| | Track | Track display on a map |
| Statistical Graph of Information | Bar graph | |
| Statistical Mode of Information | Statistics by day, week, month, quarter as well as customized time period | |



| | | |
|----------------------|---|---|
| Perimeter Protection | Human/Vehicle Classification (AI by IPC) | 16 CH |
| | Human/Vehicle Classification (AI by Device) | 2 CH (2MP) |
| Video Metadata | Human/Vehicle Attribute Analysis | Yes (AI by IPC) |
| Other Functions | Fisheye | Supports fisheye camera access |
| | Plate Recognition (AI by IPC) | Yes |
| PoE | PoE Port | RJ 45 100Mbps × 16 |
| | Standard | IEEE802.3AF/AT |
| | Output Power | ≤ 150W |
| Network | Interface | RJ 45 1000 Mbps × 1 |
| | Protocol | TCP / IP, IPv4, IPv6, UDP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, HTTP, FTP, SMTP, HTTPS, 802.1x, RTSP, RTP, RTCP, WebSocket, SNMP, IGMP, ONVIF |
| | Client Connection | Max. 64 users access |
| Mobile Device | OS | iOS, Andriod |
| Storage | HDD Interface | SATA × 2, max 10T for each HDD |
| | Local Backup | U disk, USB mobile HDD |
| Backup | Network Backup | Yes |
| | External Interface | RS 485 |
| Others | USB | USB 3.0 × 1 ; USB 2.0 × 2 |
| | Remote Controller | Optional |
| | Power Supply | DC48V/3.75A |
| Others | Consumption | ≤ 20W (without HDD and PoE power supply) |
| | Certificate | CE, FCC |
| | Environmental Protection | Directive EU RoHS, REACH and WEEE |
| | Dimensions(mm) | 380 × 268 × 45 (W × D × H) |
| | Working Environment | -10 ~ 50 °C , 10% ~ 90% humidity |

Features

- Supports 16 CH 16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF IPC Input
- H.265S/H.265+/H.265/H.264
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-type recording: manual / timed / motion / sensor / POS / AI recording
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event, tag and smart search
- Supports face detection and comparison
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Supports license plate recognition
- Supports POS information overlay on live view and playback
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Compatible with third-party IPCs, such as ONVIF, Hikvision, etc.
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- Supports 16CH PoE IPC direct connection to NVR via PoE ports
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Supports PTZ preset and auto cruise
- Supports NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS



DIMENSIONS

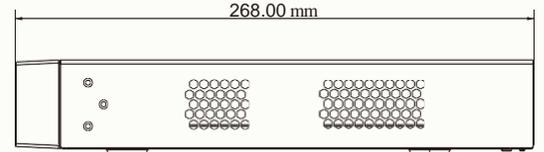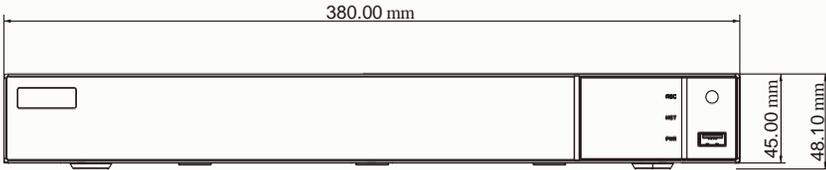

Rear Panel

